




Serie **EURO-SFER**

Articolo **730003**

Válvula de bola con bridas PN16 en hierro fundido, de paso total, según normas EN 558 basic serie 14 (DN 200 basic serie 27).

Limiti di temperatura: -10° +120° - Temperature range: -10° +120° Vuoto: 10-3 torr. - Vacuum: 10-3 torr.

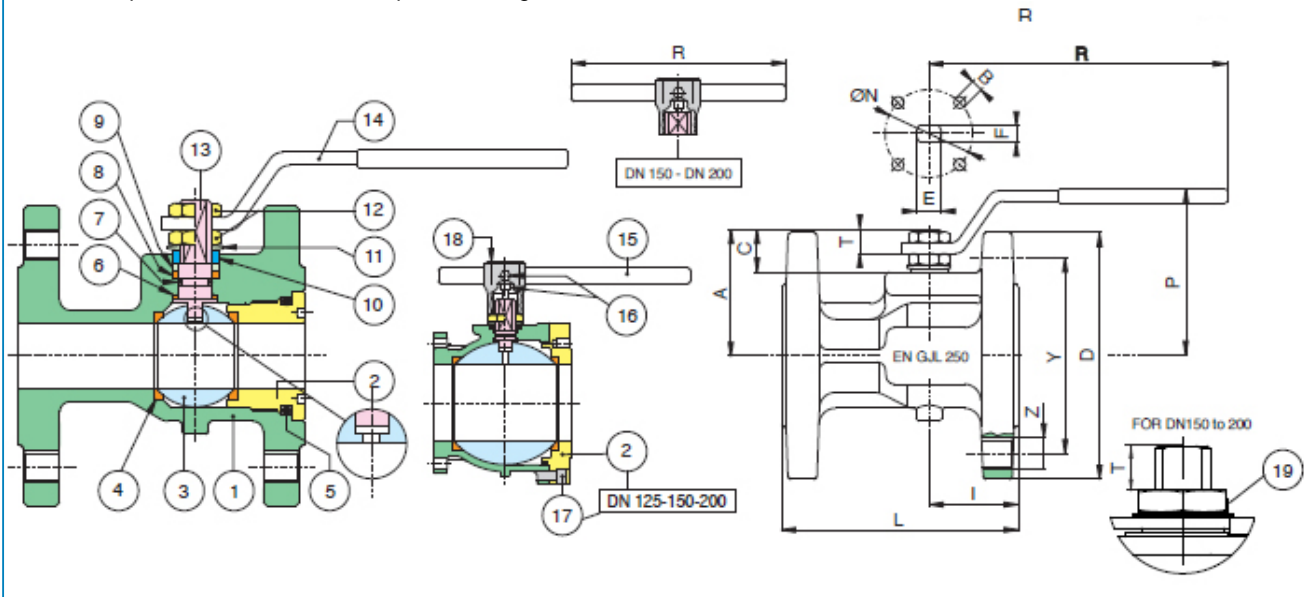

POS.	DENOMINACION	MATERIALE - MATERIALS - MATERIAUX - WER- KSTOFF- MATERIAL	N°P
1	CUERPO	EN-GJL-250	1
2	TERMINAL	ASTM A105	1
3	BOLA	A351-CF8	1
4	ASIENTO ESFERA	P.T.F.E	2
5	O-RING	NBR	1
6	EMPAQUETADURA	P.T.F.E	1
7	O-RING	NBR	1
8	ASIENTO EJE	P.T.F.E	1
9	MANGUITO PRENSAESTOPAS	CARBON STEEL	1
10	ARANDELA MEDIA VUELTA	INOX AISI 430 (DN15 - DN50) CARBON STEEL DN65 - DN200)	2-1
11	MUELLE CONTENEDOR	CARBON STEEL	2
12	TUERCA	CARBON STEEL	2
13	EJE	A479-Tp304	1
14	PALANCA	CARBON STEEL	1
15	PALANCA DN 150-200	CARBON STEEL	1

16	TORNILLO	CARBON STEEL	1
17	TORNILLO	CARBON STEEL	8
18	CUERPO PALANCA DN 150-200	EN-GJL-250	1
19	ARANDELA DESENROSCADO	A182-F316	1

MISURA SIZE	DN	D	Y	Z	I	L	R	P	A	C	T	E	F	ØN	B	Kv	PN	Kg
1"	25	115	85	4 X M12	44,5	125	174	79	59	19,5	11,5	12	8	-	-	64,5	16	3,10
1"1/4	32	140	100	4 X M16	51,5	130	174	85	64	18	10	12	8	-	-	103,8	16	4,80
1"1/2	40	150	110	4 X M16	49	140	250	103	78	24	13	16	10	-	-	174,0	16	6,10
2"	50	165	125	4 X M16	52	150	250	110	85	24	13	16	10	-	-	301,3	16	7,80
2"1/2	65	185	145	4 X M16	65	170	321	126	103	28	18	20	14	-	-	545,7	16	11,40
3"	80	200	160	8 X M16	66	180	321	137	114	28	18	20	14	70	M8	872,5	16	14,10
4"	100	220	180	8 X M16	89	190	381	158	137	32,5	20,5	24	18	102	M10	1363,3	16	20,00
5"	125	250	210	8 X M16	100	200	381	180	159	32	20,5	24	18	102	M10	2360,3	16	30,40
6"	150	285	240	8 X M20	105	210	700	265	201,5	51,5	30	42	30	125	M12	3671,1	16	44,50
8"	200	340	295	12 X Ø22	200	400	700	308	244	52	30	42	30	125	M12	6816,6	16	103,00